

R215L

SMART X PLUS



* Design aesthetics & features may vary from actual

OPERATING WEIGHT: 22200 kgs

GROSS POWER : 148 HP @ 2000 rpm

BUCKET CAPACITY: 0.87 - 1.7m³

DESIGNED FOR SMART WORK

BEST-IN-CLASS PERFORMANCE

- Cyclonic Air Precleaner **NEW**
- Wide Range of Bucket **NEW**
- Advanced CAPO System
- Hydraulic Flow Summation
- Swing Priority
- Regeneration System
- Excellent Digging Forces

OPERATOR COMFORT

- Bluetooth FM Radio **NEW**
- Removable Type Floor Mat **NEW**
- LED Working Lamps **NEW**
- Spacious Cabin
- Fully Adjustable Seat
- Enhanced Visibility
- User Friendly Functionality

INCREASED MACHINE DURABILITY

- Superior Lubrication and Wear Protection **NEW**
- Polymer Shim **NEW**
- Stub Adapter **NEW**
- Strengthend Undercarriage
- Proven Upper Structure
- Forged Ring Body
- Reinforced Front Attachment



R215L SMART X PLUS



IMPROVED FUEL EFFICIENCY

- New ECO Mode
- Fuel Saving Kit
- Electro Hydraulic System
- Auto Deceleration System
- Efficient Breaker Mode

SIMPLIFIED MAINTENANCE

- Fuel Filler Pump **NEW**
- Easy Serviceability
- Extended Maintenance
- Large Capacity Fluid Tank
- Low Life Cycle Cost

PARTS & SUPPORT

- Remote Management System (Hi-Track)
- Hyundai Genuine Parts
- Max Parts Availability
- On-Site Product Support

ENHANCED SAFETY

- Emergency Shutdown Switch* **NEW**
- Turbocharge Guard **NEW**
- Cabin Top Guard* **NEW**
- Beacon Lamp* **NEW**
- Swing Lock* **NEW**
- Seat Belt*

(* Optional)

PERFORMANCE

PRIDE AT WORK

Hyundai construction equipment strives to build state-of-the-art earthmoving equipment to give every operator maximum performance, more precision, versatile machine preferences, and proven quality. New technologies designed to improve performance and precision, make the Hyundai excavator smooth, fast and easy to control. Take pride in your work with Hyundai!



ENGINE

The water cooled, 4 cycle diesel, 6 cylinder in line, direct injection turbocharged, charge air cooled engine is built for power, reliability, efficiency and reduced emissions.

The engine is manufactured to perform in wide range of heat, humidity and dust conditions without compromising productivity.



R215L SMART X PLUS



HYDRAULIC SYSTEM

Electro hydraulic control system provides wide range of flow at various workloads for paramount productivity. Open center design of Main Control Valve (MCV) ensures fast response and maximum efficiency in tough conditions.



CHARGE AIR COOLER

- Cools the air as it passes through turbocharger
- Resulting in cool high density, bigger mass of air being pumped to engine
- Increasing the burning efficiency

CHOICE OF OPERATING MODE

Working Mode	Advantage
P Mode	• Maximum Power • Fast Cycle time
S Mode	• Balance between power and fuel efficiency
Eco Mode	• Better fuel efficiency
Breaker Mode	• Sets pump flow to optimal level and boosts efficiency



EFFICIENT COMBINED OPERATION

Inbuild flow summation system and Swing priority function leads to faster swing cycle results in excellent output



BEST-IN-CLASS TRAVEL PERFORMANCE

- Higher traction force
- Dual travel option
- High maneuverability

Traction Force : 21100 kgf



DIGGING FORCES

Higher output even in tough working conditions

- **Bucket - 15800 kgf**
- **Arm - 12600 kgf**

FUEL EFFICIENCY



IMPROVED FUEL EFFICIENCY

Advanced CAPO System, Newly Designed CMCU, Power & Working Mode options results in excellent fuel efficiency.

FUEL SAVING KIT

- Monitor undue load and cut down losses.
- Provides better fuel efficiency

NEGATIVE FLOW CONTROL

Optimum balance between pump and engine output for better fuel efficiency



ARM REGENERATION SYSTEM


- Smooth Operation
- Prevent Cavitation
- Increased Performance & Fuel Efficiency

ONE TOUCH IDLE & AUTO DECELERATION

Prevents fuel losses by reducing engine rpm during no-load condition

EXCLUSIVE BREAKER MODE

Excellent fuel saving due to exclusive power for breaker operation

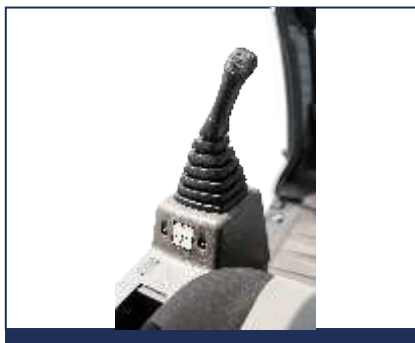

NEW
ECO MODE

MOBILE
CHARGING POINT



MULTI LANGUAGE



INSTRUMENT PANEL

The user-friendly multi language option cluster making it easy to check all critical systems like

- Hydraulic oil temperature,
- Coolant temperature
- Fuel level
- Self diagnostic checks
- Maintenance management

to optimizing productivity needs ensuring fuel efficiency

OPERATOR COMFORT

OPERATOR DELIGHT

More space, better visibility, powerful air-conditioning and adjustable fully suspension seat, easy to access controls ensure that the operator can work for longer hours without stress or fatigue in the comfortable and safe working environment.

360 degree visibility, fully open sunroof, added side lamp & mirror ensure comfortable, safe working environment.



OPERATOR SEAT

- Easily adjustable fully suspension seat with adjustable arm rest
- Operator seat belt

SPACIOUS CABIN

- More head room, large space, large door for easy entry and exit

REMOVABLE TYPE FLOOR MAT



AIR CONDITIONER

- High Performance Air Conditioner
- Improved AC Ducting
- Water Bottle Cooling System



- AC Front Vent
- Hour Meter
- 24V Socket


LED LAMP **NEW**



SUN VISOR (OPTIONAL)



INTEGRATED AUDIO SYSTEM WITH BLUETOOTH **NEW**

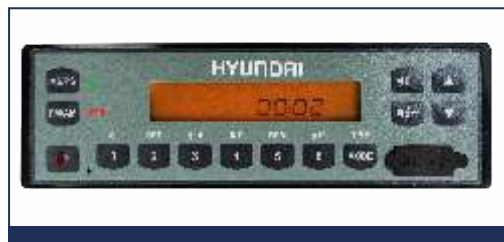

RELIABILITY



REINFORCED FRONT STRUCTURE

Use of specialized advance steel plates and reinforced design for higher strength and durability

HEAVY DUTY BUCKET WITH STUB ADAPTER **NEW**

ULTIMATE RELIABILITY



Reinforced idler frame



Lower frame belly guard



1 pc cast H link



Reinforced bucket link



HD TRACK LINK



ROCK GUARD



TANK SAFETY COVER



SWING & TRAVEL SYSTEM

Highly efficient Hyundai designed swing and travel system ensure maximum reliability and performance.



IP69 RATING

RELIABLE ELECTRICALS

- Dust and water proof connectors
- Longer component life



AIR PRE-CLEANER **NEW**

- Removes dirt and Debris from air before entering air filter
- Improves air filter life
- Low maintenance cost

RUGGED UNDERCARRIAGE

X frame provides excellent resistance to torsional bending to enhance structure life



SERVICEABILITY

LEADING SERVICE INTERVAL

More efficient cooling system which extend service intervals , minimize operating cost and reduce machine down time.

CHANGE INTERVAL

Hydraulic oil	5000 hrs
Hydraulic filter	1000 hrs
Engine oil	500 hrs
Engine Filter	500 hrs



IMPROVED COOLING EFFICIENCY

- Radiator and oil cooler are arranged side by side to maximize efficiency
- Easily accessible from ground level to clean



LARGE LCD MONITOR

Operator can check the machine's vital signs without any difficulties

- **Maintenance Management**
Proactive maintenance
- **Self Diagnostic**
Reduces down time
- **Warning Indicator**
Ensures safe working

DURABLE MOUNTING PIN BUSH



FUEL FILLER PUMP **NEW**



DIMPLE BUSH **NEW**



HINGED TYPE FRONT GLASS GUARD FOR EASY CLEANING

EASY ACCESSIBILITY

Easy access for maintenance means regular checks get done faster. Hyundai's SMART X PLUS machines feature easy service access to increase uptime and reduce operating costs.



SAFETY

SAFETY - PEACE OF MIND AND OPERATOR CONFIDENCE

Cabin is integrally welded with low-stress using high strength steel to provide enhanced protection. Handrails and steps are provided for easy operation. Engine fan guard avoid chances of accidental injury.



COUNTER BALANCE VALVE

Works as a hydrostatic brake and prevents machine against accidental roll down in steep gradients.



BOOM & ARM HOLDING SYSTEM

Prevent attachments from drifting against gravity due to prolonged overhanging.



ANTI RESTART FUNCTION

Prevents starter from damage during engine operation



BATTERY DISCONNECT SWITCH

Cut off power during maintenance and protect batteries from excessive drain



AUTO ENGINE OVERHEAT PREVENTION

Auto Deceleration with activation of engine overheat warning to avoid catastrophic failure



EMERGENCY SHUTDOWN SWITCH **NEW**

Stop the excavator's operation in case of an emergency



TURBOCHARGE GUARD **NEW**


Safety During Maintenance



GREASE NIPPLE WITH CAP **NEW**



POSITIVE LOCKING CLAMP **NEW**



FIRE EXTINGUISHER **NEW**

PARTS & SUPPORT

HYUNDAI GENUINE PARTS

Developed in synergy with our machines, Hyundai parts and lubricants ensure that you get the high levels of performance, reliability and safety that come with the complete Hyundai experience.

Enjoy the confidence and assurance of the most stringent testing procedures and the high quality manufacturing processes safeguarding your machine's health. Experience the versatility of our 200+ strong outlet network across India.

WHY RISK IT?

Maximize profits and extend your machine's life.



BENEFITS OF USING GENUINE HYUNDAI PARTS AND LUBRICANTS

- Genuine Hyundai Parts meet strict specifications and standards in Chemistry, Microstructure and Tensile Strength.
- Benefit from the continuous improvements and advancements made by Hyundai's technical team
- Improved performance of hydraulics and engine components
- Enjoy greater productivity with higher uptime
- Higher resale values
- Reduced oil consumption and unexpected breakdowns
- Enhanced component life



HI-TRACK

Our unique Remote Management System allows customers to access machine operating information & obtain service & maintenance alerts at the touch of a button




INCREASED PRODUCTIVITY

Remote management system empowers you to enhance the efficiency of your operations. Make better decision by comparing the machine's operating time with its travelling idling & breaker use duration.

CONVENIENT & EASY MONITORING

Enjoy round the clock and on the move access to your machine information through the website or mobile app.

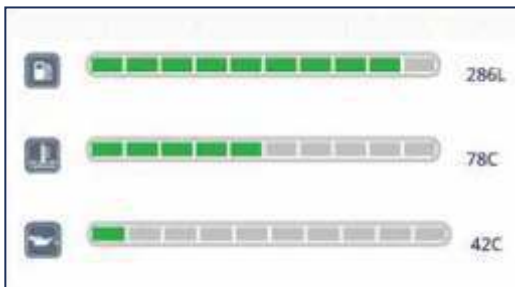

PROACTIVE MAINTENANCE

Access your machines service & maintenance history with the utmost convenience. Plan your service schedules intelligently with our regular reminders.



ALARMS

Get notified of system alarms & protect your machine from critical faults & experience repairs.



MULTILINGUAL USER INTERFACE **NEW**

IMPROVED DATA CONNECTIVITY **NEW**

SECURITY & FLEET MONITORING

Protect your machine from theft or unauthorized use. GPS features allows you to create a geo-fence & alerts you if the machine moves out of the defined boundary.

SPECIFICATION

Engine

Maker/Model		Cummins6BTAA-5.9C	
Rated flywheel horse power	SAE	J1995 (Gross) J1349 (Net)	148HP (110KW) @2000rpm 145HP (108KW) @2000rpm
Max Torque	63.7kgf.m(461 lb.ft) @1300rpm		
Displacement	5880cc		

Hydraulic System

Main pump	
Type	Two variable displacement piston pumps
Max. flow	2x220 lpm
Sub-pump for pilot circuit	Gear pump
Cross-sensing & fuel saving pump system	

Hydraulic Motors

Travel	Two speed axis piston motor with counter balance valve and parking brake
Swing	Axial piston motor with automatic brake

Relief Valve Settings

Implement Circuit	330kgf/cm ²
Travel	330kgf/cm ²
Swing Circuit	240kgf/cm ²
Pilot Circuit	35kgf/cm ²
Service valve	Installed

Coolant & Lubricant Capacity

REFILLING	LITER
Fuel tank	340
Engine coolant	35
Engine oil	21
Swing device	5
Final drive (each)	6.0
Hydraulic system / Hydraulic tank	280/150

Drives & Brakes

Drive method	Fully hydrostatic type
Drive motor	Axial piston motor in-shoe design
Reduction system	Planetary reduction gear
Max.drawbar pull	21100kgf (46500 lbf)
Max.travel speed (high/low)	5.3kmph/3.4kmph
Gradeability	35 Degree (70%)
Parking brake	Multi wet disc

Undercarriage

X-Leg type centre frame is integrally welded with reinforced box section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing spring and sprockets and trackchain with triple grouse shoes.

Centre frame	X-leg type
Track frame	Pentagonal box type
No. of shoes on each side	49
No. of carrier rollers each side	2
No. of track rollers each side	9
No. of rail guard each side	2

Swing System

Swing motor	Axial piston motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease bathed
Swing brake	Multi wet disc
Swing speed	11 rpm

Operating Weight

Shoe Width mm (in)	Operating weight kg (lb)	Ground pressure kgf/cm ² (psi)
600 mm (24")	22,200 (48,943)	0.47 (6.68)

Dimensions

(mm)




A	Tumbler distance	3640
B	Overall distance of crawler	4440
C	Ground clearance of counter weight	1060
D	Tail swing radius	2845
D'	Rear-end length	2770
E	Overall width of upper structure	2700
F	Overall height of cabin	2920
G	Min. ground clearance	480
H	Track gauge	2390
I	Overall length	9610
J	Overall height of boom	3210
K	Track shoe width	600
L	Overall width	2990

SPECIFICATION

Working Ranges

(mm)

Arm length		2000	*2400	2920
A	Max. digging reach	9,099 (29'10")	9,474 (31'1")	9,950 (32'8")
A'	Max. digging reach on ground	8,926 (29'3")	9,309 (30'7")	9,793 (32'2")
B	Max. digging depth	5,820 (19'1")	6,220 (20'5")	6,740 (22'1")
B'	Max. diggign depth(8ft level)	5,579 (18'4")	6,012 (19'9")	6,560 (21'6")
C	Max. Vertical wall digging depth	4,879 (16'0")	5,276 (17'4")	5,912 (19'5")
D	Max. digging height	9,050 (29'8")	9,266 (30'5")	9,522 (31'3")
E	Max. dumping height	6,275 (20'7")	6,490 (21'4")	6,730 (22'1")
F	Min. swing radius	3,776 (12'5")	3,658 (12'0")	3,673 (12'1")

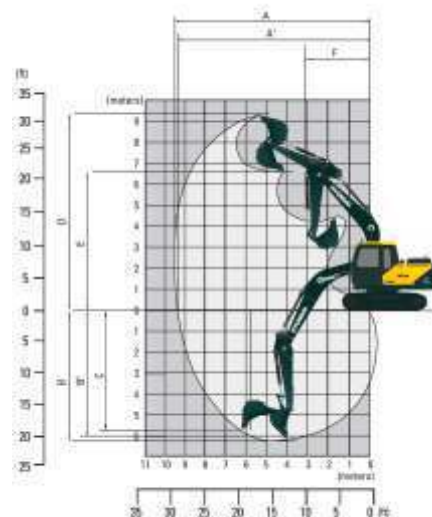


Bucket Digging Force 15800 kgf
Arm Crowd Force (2.4 m) 12600 kgf


BUCKETS

All buckets are welded with high-strength steel.

GENERAL PURPOSE



HEAVY DUTY



Capacity - M3			Width - mm	Weight - kg	Tooth EA	Recommendation		
						5.68m Boom		
Bucket Type	SAE Heaped	CECE heaped				3.8T CWT		
						2.0m Arm	2.4m Arm	2.92m Arm
GP	0.92	0.81	1032	738	5	●	●	●
GP	1.05	0.88	1132	803	5	●	●	●
GP	1.20	0.92	1283	802	6	■	■	■
HD	0.87	1.05	966	982	5	●	●	●
HD	0.95	0.76	1091	1063	5	●	●	●
HD	1.10	0.81	1256	1127	5	●	●	■
COAL	1.70	0.83	1431	908	5	▲	▲	▲

- : Applicable for materials with density of $\leq 2,000 \text{ kg/m}^3$
- : Applicable for materials with density of $\leq 1,600 \text{ kg/m}^3$
- ▲ : Applicable for materials with density of $\leq 1,100 \text{ kg/m}^3$

SPECIFICATION

ATTACHMENT

Boom and arms are welded with a low-stress, full-box section design 5.68m (18' 8'') mono boom and 2.4m (7' 10''), 2.92m (9' 7'') Arms available. Buckets are all-welded, high-strength steel equipments.

DIGGING FORCE

Arm	Length	mm(ft.in)	2,000(6'7'')	*2400(7'10'')	2920(9'7'')
	Weight	kg(lbs)	614(1354)	718(1583)	735(1620)
Bucket Digging Force	SAE	kN	134	134	134
		kgf	13,700	13,700	13,700
		lbf	30,100	30,100	30,100
	ISO	kN	155	155	155
		kgf	15,800	15,800	15,800
		lbf	34,900	34,900	34,900
Arm Crowd Force	SAE	kN	140	118	99
		kgf	14,300	12,000	10,100
		lbf	31,500	26,500	22,300
	ISO	kN	148	124	104
		kgf	15,100	12,600	10,600
		lbf	33,300	27,700	23,300

*Standard arm

LIFTING CAPACITIES

LIFTING CAPACITIES R215L SMART PLUS



Rating over-front



Rating over-side


Boom type	Length[mm]	Arm type		Length[mm]		BK type		Capa.[m³]		CWT[kg]		Shoe(wheel)[mm]		
HD	5680	GP		2000		HD		1.10		3800		600		
Lift-point height (m/ft)		Lift-point radius								At max. reach				
		3.0m (9.8ft)		4.5m (14.8ft)		6.0m (19.7ft)		7.5m (24.6ft)		Capacity		Reach		
												m(ft)		
7.5m 24.6ft	kg lb											*5,300 *11,680	*5,300 *11,680	4.94 (16.2)
6.0m 19.7ft	kg lb					*5,030 *11,090	4,570 10,080					*5,090 *11,220	4,170 9,190	6.32 (20.7)
4.5m 14.8ft	kg lb			*6,320 *13,930	*6,320 *13,930	*5,330 *11,750	4,440 9,790					*5,110 *11,270	3,360 7,410	7.12 (23.4)
3.0m 9.8ft	kg lb					*5,990 *13,210	4,210 9,280	5,190 11,440	3,010 6,640	5,150 11,350	2,990 6,590	7.54 (24.7)		
1.5m 4.9ft	kg lb					*6,660 *14,680	4,000 8,820	5,100 11,240	2,930 6,460	4,960 10,930	2,850 6,280	7.64 (25.1)		
0.0m 0.0ft	kg lb			*9,670 *21,320	5,740 12,650	6,970 15,370	3,870 8,530			5,110 11,270	2,910 6,420	7.44 (24.4)		
-1.5m -4.9ft	kg lb			*9,420 *20,770	5,750 12,680	6,940 15,300	3,850 8,490			5,690 12,540	3,220 7,100	6.90 (22.6)		
-3.0m -9.8ft	kg lb	*11,430 *25,200	11,310 24,930	*8,430 *18,580	5,880 12,960					*6,110 *13,470	4,030 8,880	5.95 (19.5)		
-4.5m -14.8ft	kg lb													

Boom type	Length[mm]	Arm type		Length[mm]		BK type		Capa.[m³]		CWT[kg]		Shoe(wheel)[mm]		
HD	5680	GP		2400		HD		1.10		3800		600		
Lift-point height (m/ft)		Lift-point radius								At max. reach				
		3.0m (9.8ft)		4.5m (14.8ft)		6.0m (19.7ft)		7.5m (24.6ft)		Capacity		Reach		
													m(ft)	
7.5m 24.6ft	kg lb											*4,810 *10,600	*4,810 *10,600	5.51 (18.1)
6.0m 19.7ft	kg lb					*4,600 *10,140	*4,600 *10,140					*4,700 *10,360	3,730 8,220	6.77 (22.2)
4.5m 14.8ft	kg lb			*5,800 *12,790	*5,800 *12,790	*4,980 *10,980	4,470 9,850	*4,740 *10,450	3,080 6,790	*4,740 *10,450	3,070 6,670	7.52 (24.7)		
3.0m 9.8ft	kg lb			*7,420 *16,360	6,400 14,110	*5,690 *12,540	4,220 9,300	*4,950 *10,910	3,000 6,610	4,760 10,490	2,740 6,040	7.92 (26.0)		
1.5m 4.9ft	kg lb			*8,860 *19,530	5,910 13,030	*6,410 *14,130	3,980 8,770	5,070 11,180	2,900 6,390	4,590 10,120	2,620 5,780	8.02 (26.3)		
0.0m 0.0ft	kg lb			*9,530 *21,010	5,680 12,520	*6,900 *15,210	3,830 8,440	4,990 11,000	2,820 6,220	4,700 10,360	2,670 5,890	7.82 (25.7)		
-1.5m -4.9ft	kg lb	*9,940 *21,910	*9,940 *21,910	*9,470 *20,880	5,650 12,460	6,870 15,150	3,780 8,330			5,170 11,400	2,920 6,440	7.32 (24.0)		
-3.0m -9.8ft	kg lb	*12,200 *26,900	11,070 24,410	*8,730 *19,250	5,750 12,680	*6,400 *14,110	3,850 8,490			*5,780 *12,740	3,540 7,800	6.42 (21.1)		
-4.5m -14.8ft	kg lb	*9,370 *20.660	*9,370 *20.660	*6,640 *14.640	6,050 13.340					*5,820 *12.830	5,350 11.790	4.93 (16.2)		

LIFTING CAPACITIES

Boom type	Length[mm]	Arm type		Length[mm]		BK type		Capa.[m³]		CWT[kg]		Shoe(wheel)[mm]		
HD	5680	GP		2920		HD		1.10		3800		600		
Lift-point height (m/ft)		Lift-point radius										At max. reach		
		1.5m (4.9ft)		3.0m (9.8ft)		4.5m (14.8ft)		6.0m (19.7ft)		7.5m (24.6ft)		Capacity		Reach
														m(ft)
7.5m	kg							*4,230	*4,230			*3,580	*3,580	6.19
24.6ft	lb							*9,330	*9,330			*7,890	*7,890	(20.3)
6.0m	kg							*4,120	*4,120			*3,300	*3,300	7.33
19.7ft	lb							*9,080	*9,080			*7,280	*7,280	(24.0)
4.5m	kg							*4,570	4,550	*4,340	3,150	*3,220	2,780	8.03
14.8ft	lb							*10,080	10,030	*9,570	6,940	*7,100	6,130	(26.3)
3.0m	kg					*6,800	6,590	*5,330	4,300	*4,660	3,040	*3,290	2,510	8.40
9.8ft	lb					*14,990	14,530	*11,750	9,480	*10,270	6,700	*7,250	5,530	(27.6)
1.5m	kg					*8,410	6,040	*6,140	4,040	5,070	2,920	*3,480	2,400	8.49
4.9ft	lb					*18,540	13,320	*13,540	8,910	11,180	6,440	*7,670	5,290	(27.9)
0.0m	kg					*9,350	5,740	*6,750	3,850	4,990	2,820	*3,860	2,430	8.31
0.0ft	lb					*20,610	12,650	*14,880	8,490	11,000	6,220	*8,510	5,360	(27.3)
-1.5m	kg	*5,930	*5,930	*9,670	*9,670	*9,560	5,640	6,850	3,760	4,950	2,780	*4,520	2,630	7.84
-4.9ft	lb	*13,070	*13,070	*21,320	*21,320	*21,080	12,430	15,100	8,290	10,910	6,130	*9,960	5,800	(25.7)
-3.0m	kg	*10,410	*10,410	*13,140	*10,930	*9,090	5,690	*6,700	3,790			*5,430	3,100	7.01
-9.8ft	lb	*22,950	*22,950	*28,970	*24,100	*20,040	12,540	*14,770	8,360			*11,970	6,830	(23.0)
-4.5m	kg			*10,810	*10,810	*7,620	5,900					*5,650	4,290	5.68
-14.8ft	lb			*23,830	*23,830	*16,800	13,010					*12,460	9,460	(18.6)

- Notes:
- Lifting capacity are based on ISO 10567.
 - Lifting capacity of the Robex Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 - The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).
 - (*) indicates load limited by hydraulic capacity.

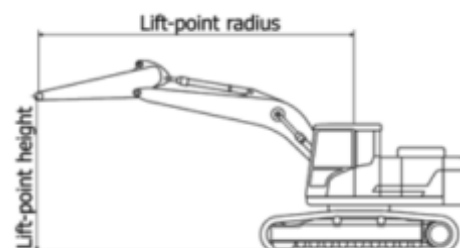

STANDARD OPTIONAL LIST

Standard Equipment

ISO Standard Cabin
All-weather Steel Cab with All-around Visibility
Safety Glass Windows
Sliding Fold-in Front Window
Sliding Side Window
Air-conditioner
Accessory Box

Computer Aided Power Optimization (New CAPO) system

3-power Mode, 2-work Mode
Auto Deceleration & One Touch Deceleration System
Auto Engine Overheat Prevention System
Self Diagnostic System
Centralized Monitoring
LCD Display
Engine Speed
Clock & Error Code
Mobile Charging Point
Fuel Level Indicator
Engine Coolant Temperature Indicator
Hyd. Oil Temperature Indicator

Warning

Fuel Level
Engine Oil Pressure
Engine Coolant Temperature
Hyd. Oil Temperature
Low Battery
Air Cleaner Clogging
Door and Cab Locks, One Key
One Outside Rearview Mirror
Dual Channel Fully Adjustable Suspension Seat
Slidable Joystick Pilot-operated
Two Front Working Lights and Two Cabin Work Lights
LED Working Lamps
Cyclonic Pre Air Cleaner
Removable Type Floor Mat
Electric Horn
Battries (2 x 12Vx 100AH)
Battery Master Switch
Removable Clean out Screen for Oil Cooler
Automatic Swing Brake
Removable Reservoir Tank
Fuel Pre-filter

Boom Holding System
Arm Holding System
Counter Weight (3800 kg)
Bluetooth FM Radio/USB player
24V Power Socket
Mono Boom (5.68m, 18'8")
Arm (2.4m, 7'10")
Standard Bucket (1.1 HD m³)
Track Shoes (600mm, 24")
Track Rail Guard
Cabin Front Protector
Operator Kit
Tool Kit
Remote Management System (Hi-Track)
Fuel Refilling Pump

Optional Equipment

Sun Visor for Cabin Inside
Beacon Lamp
Single Acting Piping Kit
Travel Alarm
Operator Seat Belt
Emergency Shutdown Switch
Cabin Top Guard
Swing Lock
Fire Extinguisher
12 mm HD Track Chain


Various Optional Arms

Arm (2.0 m)
Arm (2.92 m)

Various Optional Buckets & Attachments

Light Duty Bucket (1.20 m³)
Heavy Duty Bucket (0.95 m³)
Heavy Duty Bucket (0.87 m³)
General Purpose Bucket (0.92m³)
General Purpose Bucket (1.05 m³)
Coal Bucket (1.7 m³)
Rock Breaker
Clamshell Bucket
Quick Coupler
Orange Grapple

NOTES

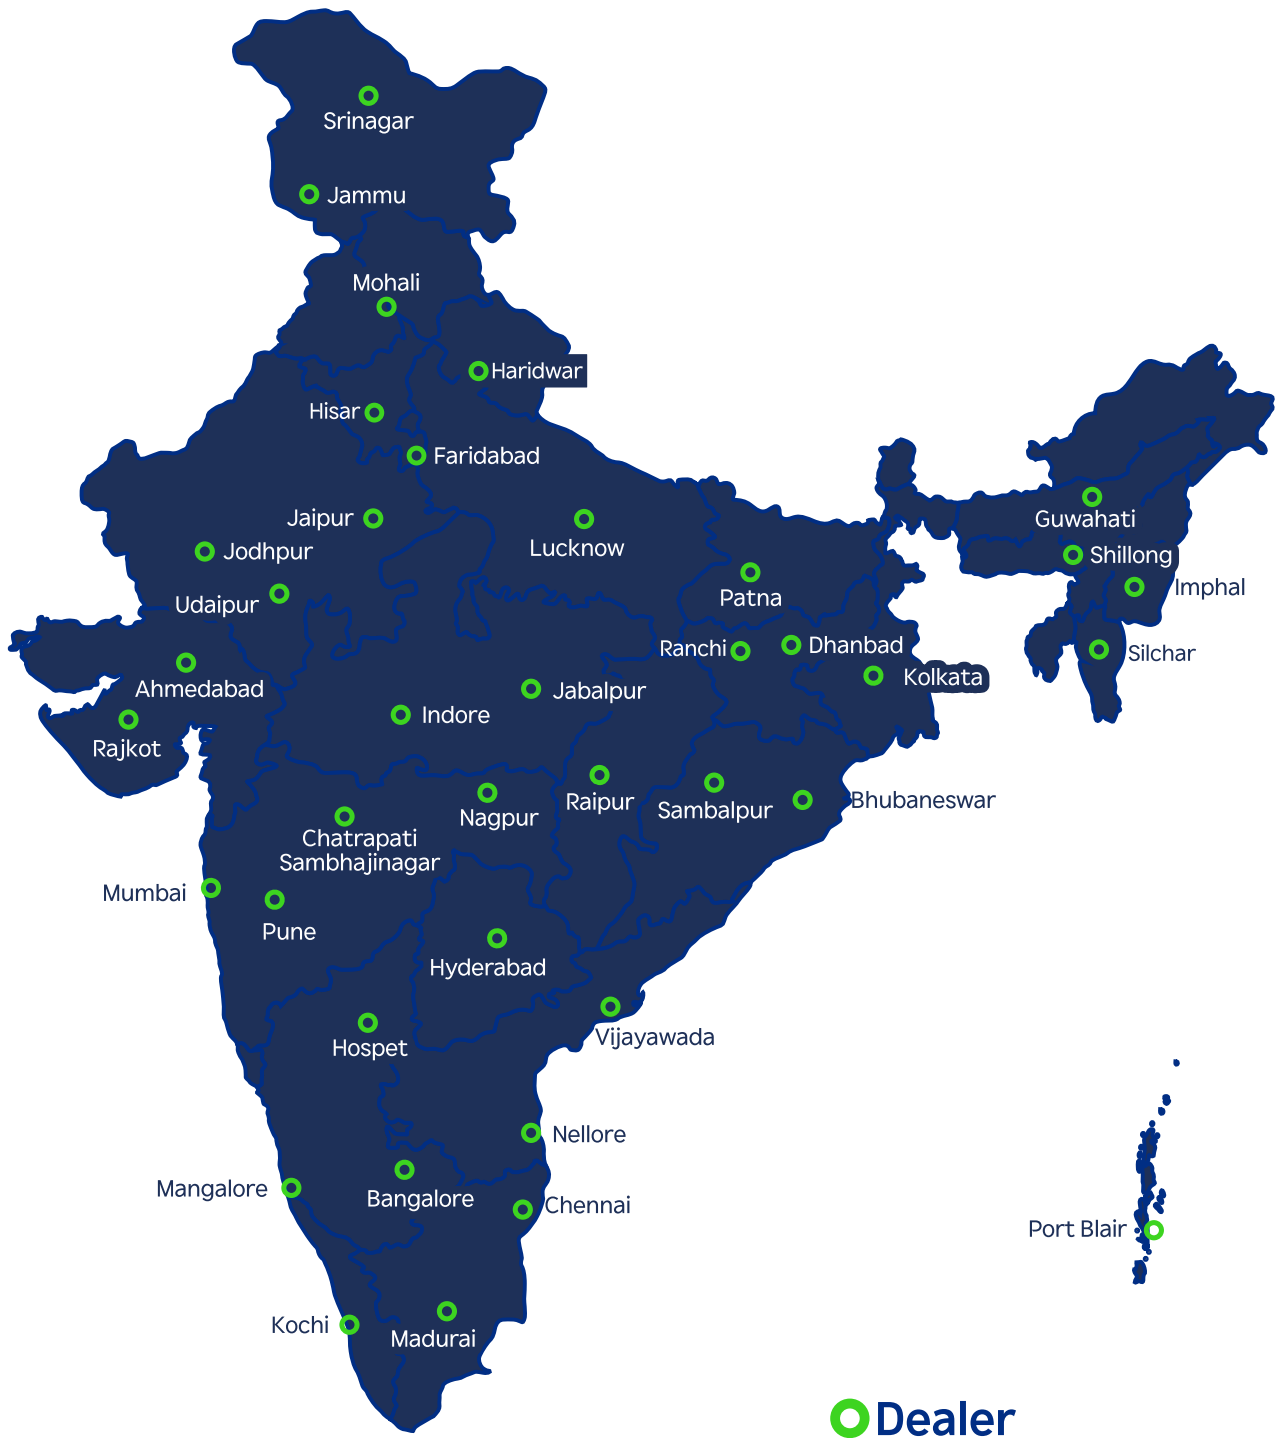

 Dealer

Disclaimer: All the locations marked on the map are of dealers head offices

HD Construction Equipment India Pvt. Ltd.

Factory Location

Plot No. A-2, M.I.D.C. Chakan, Phase II,
Village: Khalumbre, Taluka: Khed, Dist: Pune-410501
E mail: hyundai.care@theconnectionsindia.com
Toll Free No.: 1800 209 8600

Please Contact

Scan the QR code
with your phone
camera & visit



SEP 2025