

# R210 **SMART PLUS**

**OPERATING WEIGHT: 21200 kgs**

**GROSS POWER : 140 HP @ 2000 rpm**


**BUCKET CAPACITY: 0.87 - 0.92m<sup>3</sup>**






**PRODUCTIVITY**

1. Optimize bucket capacity
2. Swing priority function
3. Mode options to optimize power
4. Power control through CAPO system

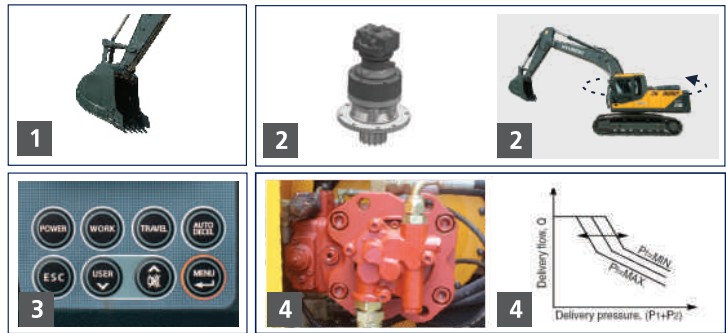

**EFFICIENCY**

1. New eco mode **New!**
2. 25% lower fuel consumption through improved technology
3. One touch idle & Auto deceleration function
4. Exclusive breaker mode
5. Dual travel speed for faster response

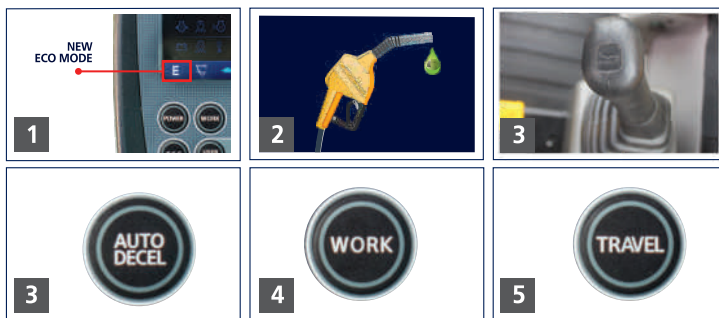

**COMF**



**OPERATOR CONVENIENCE**

1. Biggest in class AC cabin & soft controls.
2. SMART digital 7" colour display
3. Seat with multiple adjustments
4. Cabin Lights and music system




# FEATURES AND SPECIFICATIONS



## STRUCTURE & DURABILITY

1. Reinforced front attachment
2. Reinforced idler area for high durability
3. Strong X-frame
4. Bucket link Reinforcement
5. Forged ring body

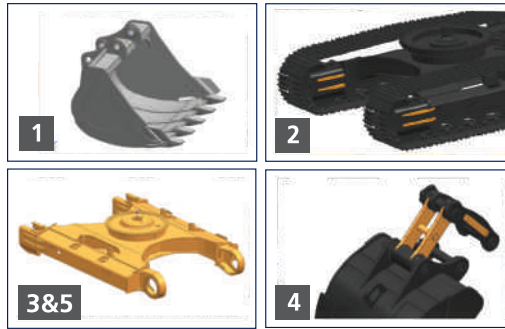


## PORT INTELLIGENCE™




## SERVICEABILITY

1. Easy Serviceability
2. Clean fuel through fuel filler pump (optional)
3. Engine oil upto 500hrs and hydraulic oil upto 5000hrs
4. Extended machine warranty for 2 years / 5000 hrs\*
5. Maintenance management system
6. Hi-Track (RMS)

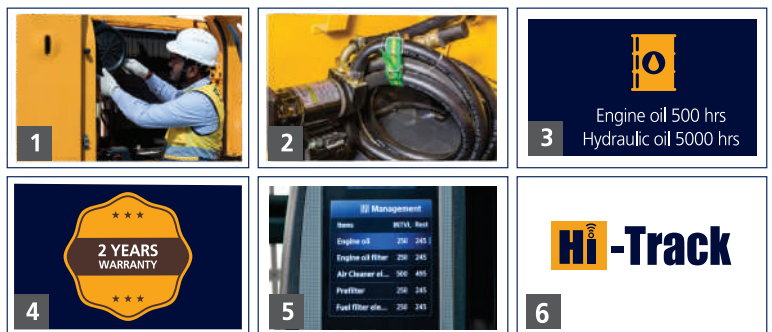

## SAFETY

1. Boom and arm holding system
2. Anti-restart System to avoid accidental damage.
3. Auto warning during machine malfunction
4. Inbuilt self-diagnostic
5. Safety lever to ensure safeguarding against machine movement.
6. Battery disconnect switch

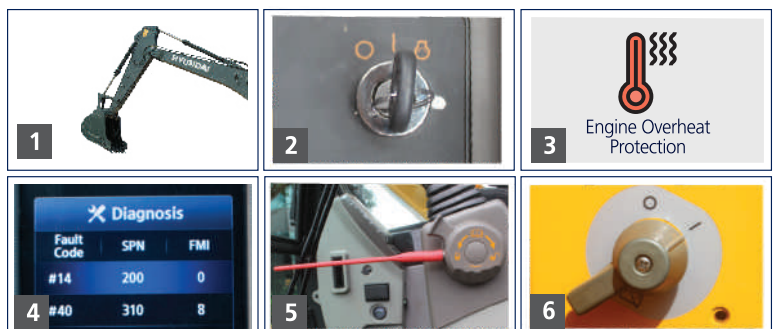

\*Terms & Conditions applicable

# SPECIFICATIONS

## Engine

<b>Maker/Model</b>		Cummins6BT5.9-C	
Rated flywheel horse power	SAE	J1995 (Gross) J1349 (Net)	140HP (104KW) @2000rpm 136HP (101KW) @2000rpm
Max Torque Displacement	57.6kgf.m @1600rpm 5880cc		

## Hydraulic System

<b>Main pump</b>	
Type	Two variable displacement piston pumps
Max. flow	2x220 lpm
Sub-pump for pilot circuit	Gear pump
Cross-sensing & fuel saving pump system	

## Hydraulic Motors

Travel	Two speed axis piston motor with counter balance valve and parking brake
Swing	Axial piston motor with automatic brake

## Relief Valve Settings

Implement Circuit	330kgf/cm <sup>2</sup>
Travel	330kgf/cm <sup>2</sup>
Swing Circuit	240kgf/cm <sup>2</sup>
Pilot Circuit	35kgf/cm <sup>2</sup>
Service valve	Installed

## Coolant & Lubricant Capacity

REFILLING	LITER
Fuel tank	340
Engine coolant	25.5
Engine oil	21
Swing device	5
Final drive (each)	5.8
Hydraulic system / Hydraulic tank	260 / 150

## Drives & Brakes

Drive method	Fully hydrostatic type
Drive motor	Axial piston motor in-shoe design
Reduction system	Planetary reduction gear
Max.drawbar pull	21100kgf (46500 lbf)
Max.travel speed (high/low)	5.3kmph/3.4kmph
Gradeability	35 Degree (70%)
Parking brake	Multi wet disc

## Undercarriage

X-Leg type centre frame is integrally welded with reinforced box section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing spring and sprockets and trackchain with triple grouse shoes.

Centre frame	X-leg type
Track frame	Pentagonal box type
No. of shoes on each side	46
No. of carrier rollers each side	2
No. of track rollers each side	7
No. of rail guard each side	1


## Swing System

Swing motor	Axial piston motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease bathed
Swing brake	Multi wet disc
Swing speed	11 rpm

## Operating Weight

Shoe Width mm (in)	Operating weight kg (lb)	Ground pressure kgf/cm <sup>2</sup> (psi)
600 mm (24")	21,200 (46,738)	0.48 (6.83)

## Dimensions

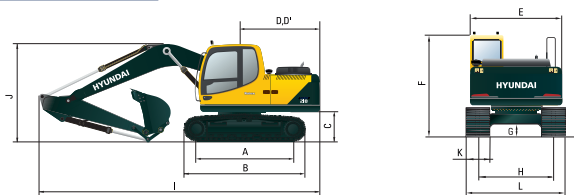


Dimension	Value	
A	Tumbler distance	3370
B	Overall length of crawler	4160
C	Ground clearance of counter weight	1060
D	Tail swing radius	2830
D'	Rear-end length	2770
E	Overall width of upper structure	2700
F	Overall height of cabin	2920
G	Min. ground clearance	480
H	Track gauge	2200
I	Overall length	9570
J	Overall height of boom	3110
K	Track shoe width	600
L	Overall width	2800

## Working Ranges

Arm length (std.)	*2400	2920	Boom length (std.)	5680
-------------------	-------	------	--------------------	------

A	Maximum Digging Reach.	9480	9950
A'	Digging Reach on Ground.	9300	9780
B	Max Digging Depth	6050	6570
B'	Max- Digging Depth (8' level).	5840	6390
C	Vertical Wall Digging Depth	5100	5710
D	Maximum Digging Height	9470	9720
E	Maximum Dumping Height.	6670	6910
F	Minimum Swing Radius.	3580	3510

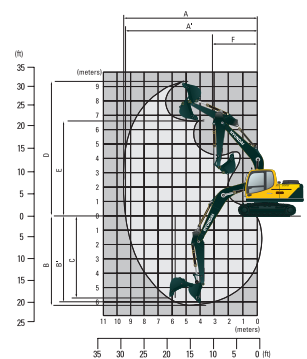

Bucket Digging Force	15600kgf
Arm Crowd Force	12500kgf

## HD Hyundai Construction Equipment India Pvt. Ltd.

### Factory Location

Plot No. A-2, M.I.D.C. Chakan, Phase II,  
Village: Khalumbre, Taluka: Khed, Dist: Pune-410501  
E mail: hyundai.care@theconnectionsindia.com  
Toll Free No.: 1800 209 8600

### Please Contact

in.hd-hyundaice.com @hdhyundaiceindia /HDHyundaiCEIndia @HyundaiCEIndia  
/hyundai-construction-equipment-india-pvt-ltd/ @hyundaiconstructionequipme9481

Scan the QR code with your phone camera & visit our website



Oct 2023